

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1		2		3		4		5		6		7		8		9		10		Customer drawing	
REV	ECN NO	DESCRIPTION						DATE		APPROVED		RoHS									
A	-	NEW RELEASED						2020.07.28		MAY.YU											

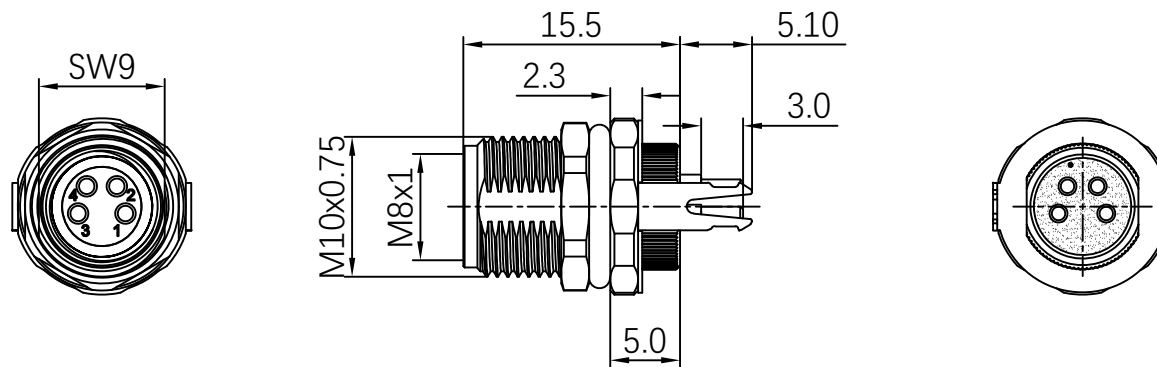


Table 1


Yameter Part No.	Coding & Pins	Socket Pin out	Contact Size(mm)	Rated Current	Rated Voltage
M08AS0339BK03	A Code 3 Pin		1.0	4A	60V/DC
M08AS0439BK03	A Code 4 Pin		1.0	4A	60V/DC
M08DS0439BK03	D Code 4 Pin		1.0	4A	60V/DC
M08BS0539BK03	B Code 5 Pin		1.0	3A	30V/DC
M08AS0639BK03	A Code 6 Pin		0.7	1.5A	30V/DC
M08AS0839BK03	A Code 8 Pin		0.6	1.5A	30V/DC

Material:

1. Insulation: PA, Black
2. Contact: Copper Alloy, Gold-Plated
3. M8 Metal Thread: Copper Alloy, Nickel-Plated
4. Nut: Copper Alloy, Nickel-Plated
5. O-Ring: NBR, Black
6. O-Ring: NBR, Black

Technical Data:

1. Standard: IEC61076-2-104
2. Rated Voltage: [See Table 1](#)
3. Rated Current: [See Table 1](#)
4. Rated Temperature: -40°C~+80°C
5. Durability: ≥500 Times Cycles
6. Protection Degree: IP67 (Correct locking state)

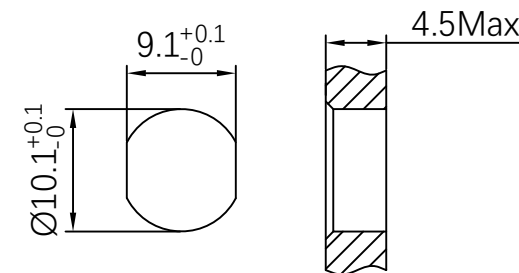

Recommend Panel CUT-OUT

UNMARKED TOLERANCES		TITLE M8 DEVICE CONNECTOR SOCKET PANEL FRONT MOUNT SHIELD FEMALE PCB SOLDER PINS		 Yameter 			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-		
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	M08XSXX39BK03	SIZE A4	REV A
ANGLES		CHECKED BY	KIMKEE	DRAWING NUMBER	M08XSXX39BK03		
x°	±1°	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1

0 10 20 30 40 50 60 70 80 90 100 110 120