


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2022.01.05	MAY.YU



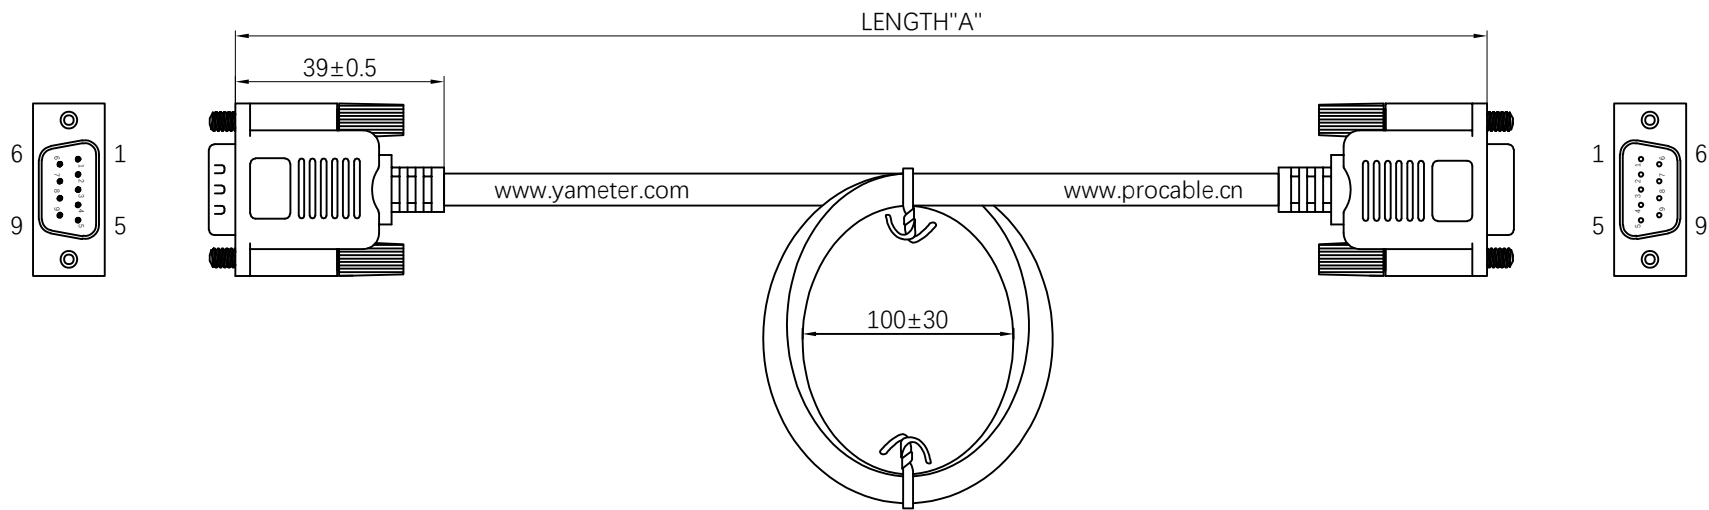


Material specifications  
Contact: Brass with gold plated  
Insulation: PBT, Black, UL94V-0  
Housing: Brass with nickel plated

Mechanical properties  
Minimum bending radius: Fixed installation: 8x Cable OD  
Flexible installation: 10x Cable OD

Electrical testing of finished cable  
100% Open / Short / Miswiring testing  
Insulation resistance: DC300V 10MΩ  
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE  DSUB 9PIN CONNECTOR CABLE ASSEMBLY		 			
DIMENSIONS	TOLERANCE						
x	±0.5	CUSTOMER	-	CUSTOMER PART NO.			
x.x	±0.25			-			
x.xx	±0.15						
0 to 500	+15 / -0	DRAWN BY	MAY.YU	PART NUMBER	dsub9pin-cable	SIZE A4	REV A
> 501	+3%/ -0 of length	CHECKED BY	BILL.LEE	DRAWING NUMBER	dsub9pin-cable		
ANGLES		APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	
x°	±1°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.