


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1		2		3		4		5		6		7		8		9		10		Customer drawing	
REV	ECN NO	DESCRIPTION						DATE		APPROVED		RoHS									
A	-	NEW RELEASED						2020.07.28		MAY.YU											

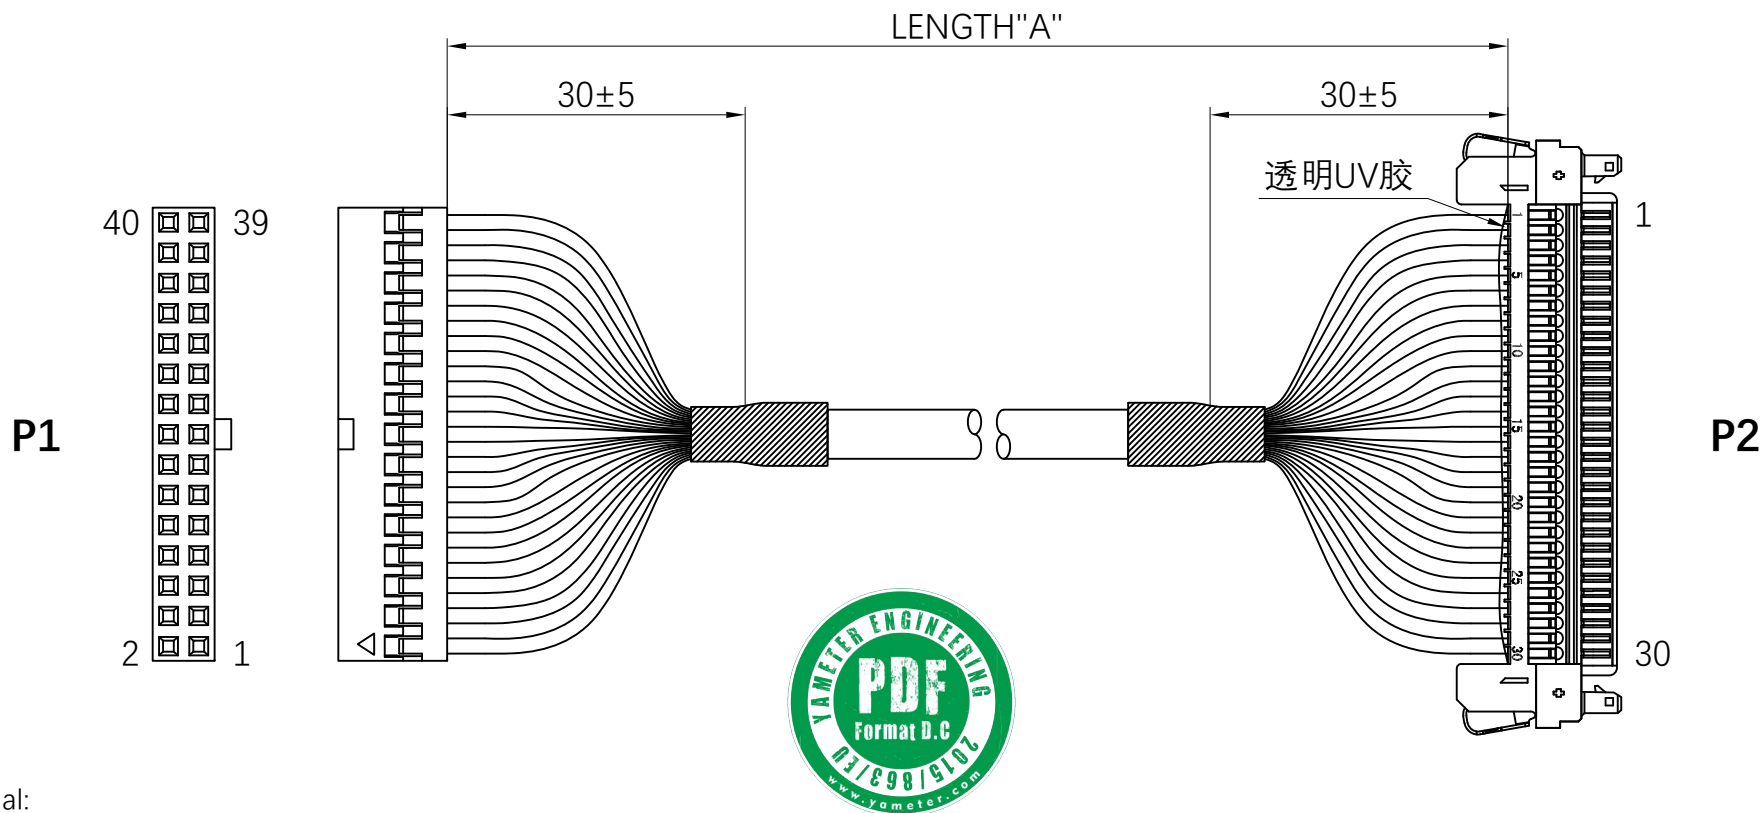

Material:

- . Housing: PA,UL94V-0
- . Contact: Phosphor bronze, Gold-plated

Technical Data:

- . Rated Voltage: 250V AC,DC
- . Rated Current: 1A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ωmax.
After environmental testing/20m Ωmax.
- . Insulation resistance: 500M Ωmin.
- . Withstanding voltage: 1500V AC/minute
- . Applicable Wire: 26AWG~30AWG

UNMARKED TOLERANCES		TITLE FI-X30HL LOCK WIRING HARNESS CABLE		 Yameter					
DIMENSIONS	TOLERANCE								
x.	±0.5								
x.x	±0.25								
x.xx	±0.15								
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-				
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	harness-fi-x30hl			SIZE	REV
		CHECKED BY	KIMKEE	DRAWING NUMBER	harness-fi-x30hl			A4	A
ANGLES		APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1		
x°	±1°								

0 10 20 30 40 50 60 70 80 90 100 110 120