


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1	2	3	4	5	6	7	8	9	10	Customer drawing
REV	ECN NO	DESCRIPTION			DATE	APPROVED				
A	-	NEW RELEASED			2020.07.28	MAY.YU				

RoHS

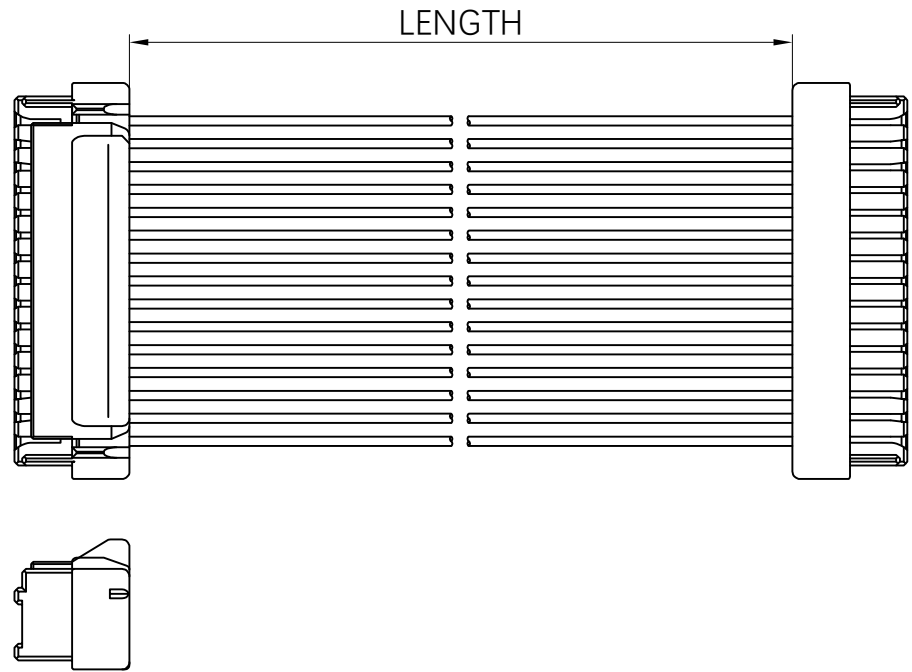

Material:

- . Housing: PBT,White,UL94V-0
- . Contact: Copper alloy, Tin-plated

Technical Data:

- . Rated Voltage: 100V AC,DC
- . Rated Current: 2A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ωmax.
After environmental testing/20m Ωmax.
- . Insulation resistance: 500M Ωmin.
- . Withstanding voltage: 500V AC/minute
- . Applicable Wire: 24AWG~28AWG
- . Matched with Contact: SPD-002T-P0.3



UNMARKED TOLERANCES		TITLE ZPDR-30V-S CONNECTOR TERMINAL CABLE WIRING HARNESS		 Yameter 			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15	CUSTOMER	-	CUSTOMER PART NO.	-		
0 to 500	+15 / -0	DRAWN BY	MAY.YU	PART NUMBER	harness-zpdr	SIZE	REV
> 501	+3%/-0 of length	CHECKED BY	BILL.LEE	DRAWING NUMBER	harness-zpdr	A4	A
ANGLES		APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	
x°	±1°						

0 10 20 30 40 50 60 70 80 90 100 110 120