


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED	Customer drawing					RoHS	
A	-	NEW RELEASED	2022.01.05	CLARA							

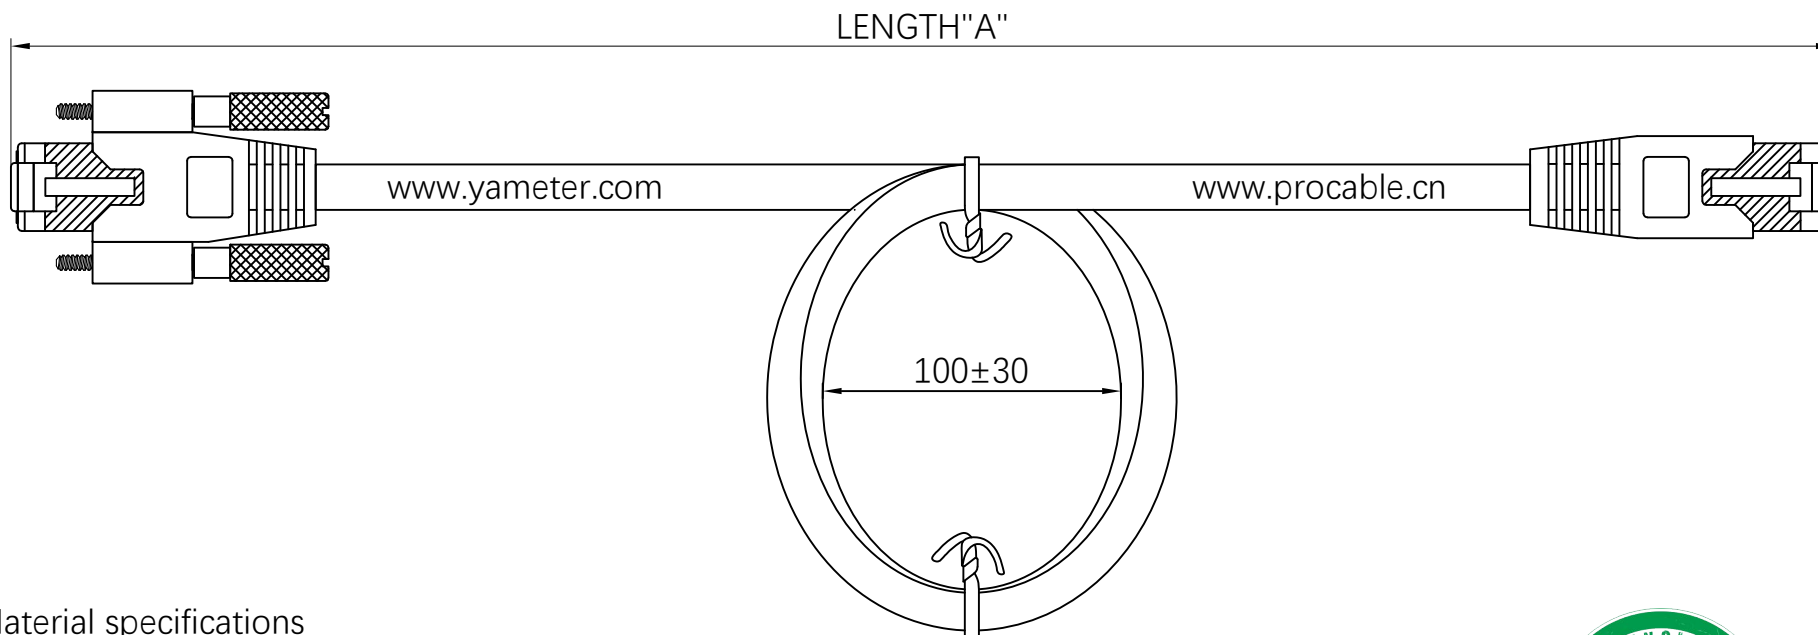

Material specifications
Contact: Brass with gold plated
Insulation: PC, UL94V-0
Housing: Brass with nickel plated

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE		Yameter		QR CODE	
DIMENSIONS	TOLERANCE						
x.	±0.5	RJ45 PLUG/PLUG EHTERNET WITH SCREW CABLE ASSEMBLY		CUSTOMER PART NO.		-	
x.x	±0.25						
x.xx	±0.15	CUSTOMER	-	PART NUMBER	lan-cable-cat5e	SIZE	REV
0 to 500	+15 / -0	DRAWN BY	CLARA	DRAWING NUMBER	lan-cable-cat5e	A4	A
> 501	+3%/-0 _{of length}	CHECKED BY	BILL	SCALE FREE		ALL DIMENSION UNIT IN MM	
ANGLES		APPROVED BY	KIMKEE				
x°	±1°					SHEET 1 OF 1	

0 10 20 30 40 50 60 70 80 90 100 110 120