


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

| REV | ECN NO | DESCRIPTION | DATE | APPROVED |
|-----|--------|--------------|------------|----------|
| A | - | NEW RELEASED | 2022.01.05 | MAY.YU |

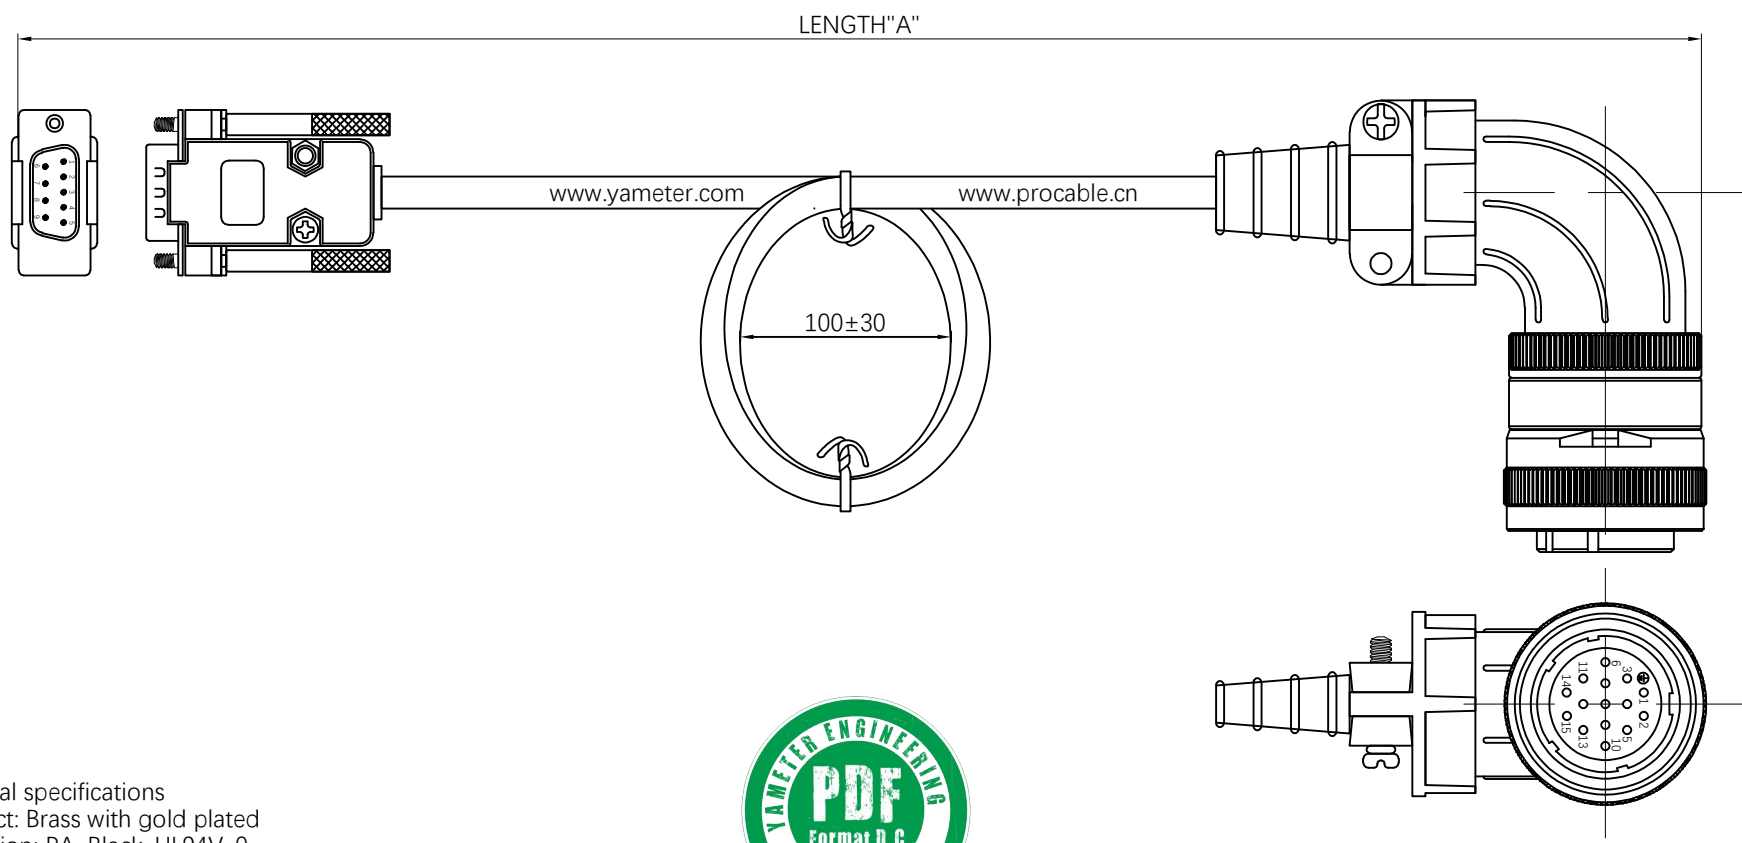

Material specifications
Contact: Brass with gold plated
Insulation: PA, Black, UL94V-0
Housing: Brass with nickel plated

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω



| UNMARKED TOLERANCES | | TITLE | | Yameter | | QR CODE | |
|---------------------|-------------------|----------------------|------------|-------------------|--------------------------|--------------|-----|
| DIMENSIONS | TOLERANCE | SERVO CABLE ASSEMBLY | | | | | |
| x | ±0.5 | | | | | | |
| x.x | ±0.25 | | | | | | |
| x.xx | ±0.15 | | | | | | |
| 0 to 500 | +15 / -0 | CUSTOMER | - | CUSTOMER PART NO. | - | | |
| > 501 | +3%/ -0 of length | DRAWN BY | MAY.YU | PART NUMBER | servo-huichuan-cable | SIZE | REV |
| ANGLES | | CHECKED BY | BILL.LEE | DRAWING NUMBER | servo-huichuan-cable | A4 | A |
| x° | ±1° | APPROVED BY | TIGER.WANG | SCALE FREE | ALL DIMENSION UNIT IN MM | SHEET 1 OF 1 | |

