



REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2022.01.05	CLARA

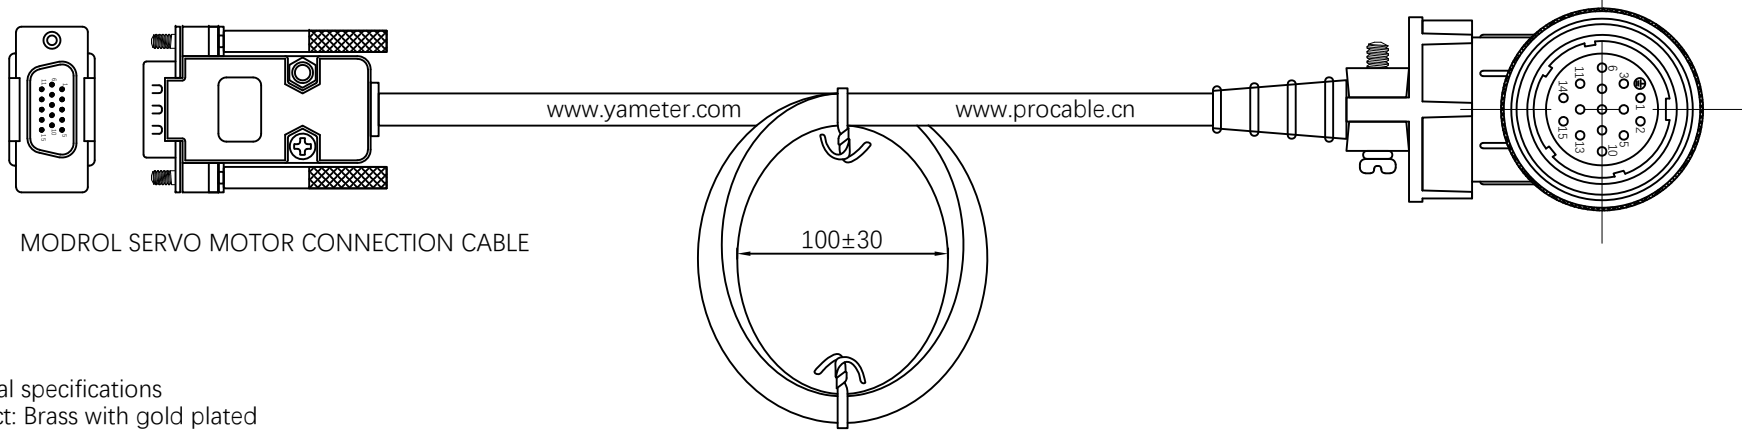

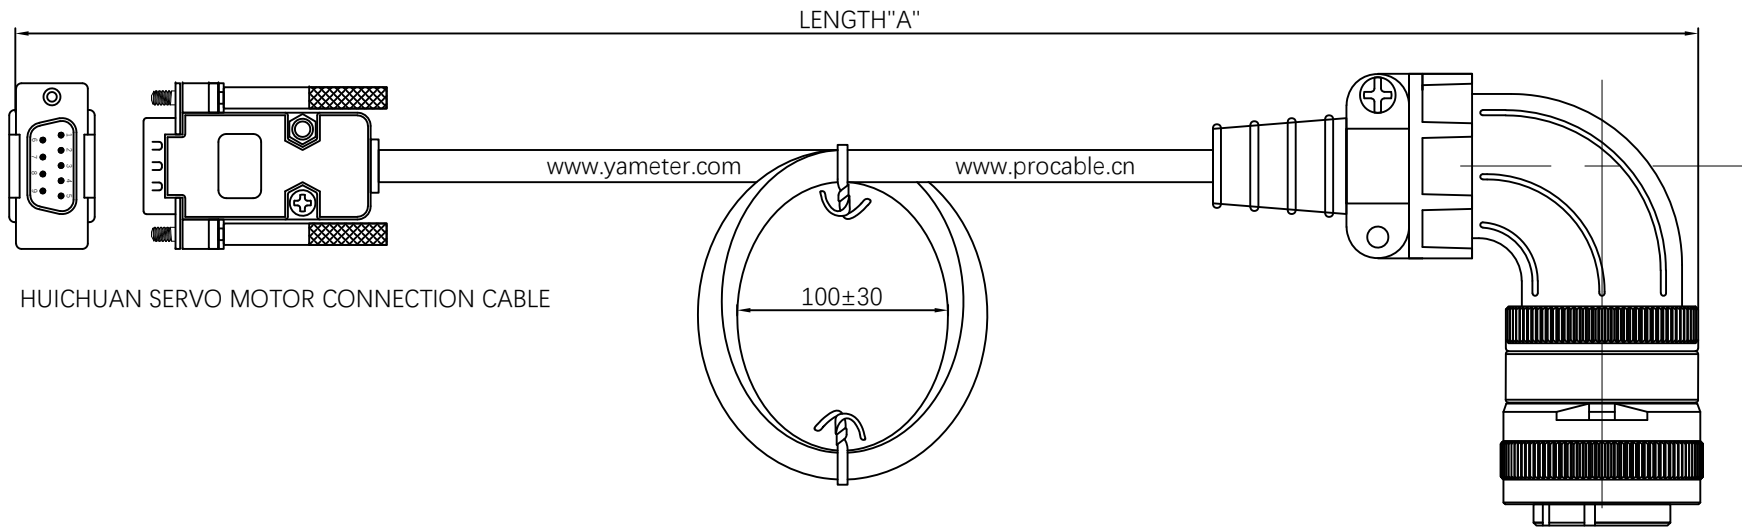


Material specifications
Contact: Brass with gold plated
Insulation: PA, Black, UL94V-0
Housing: Brass with nickel plated

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE		<div> Yameter</div> <div></div>			
DIMENSIONS	TOLERANCE						
x	±0.5	SERVO MOTOR CABLE ASSEMBLY					
x.x	±0.25						
x.xx	±0.15	CUSTOMER	-	CUSTOMER PART NO.	-		
0 to 500	+15 / -0	DRAWN BY	CLARA	PART NUMBER	servo-motor-cables	SIZE	REV
> 501	+3W/-0 of length	CHECKED BY	BILL	DRAWING NUMBER	servo-motor-cables	A3	A
ANGLES		APPROVED BY	KIMKEE	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1
x°	±1°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.