


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2020.07.28	CLARA

RoHS

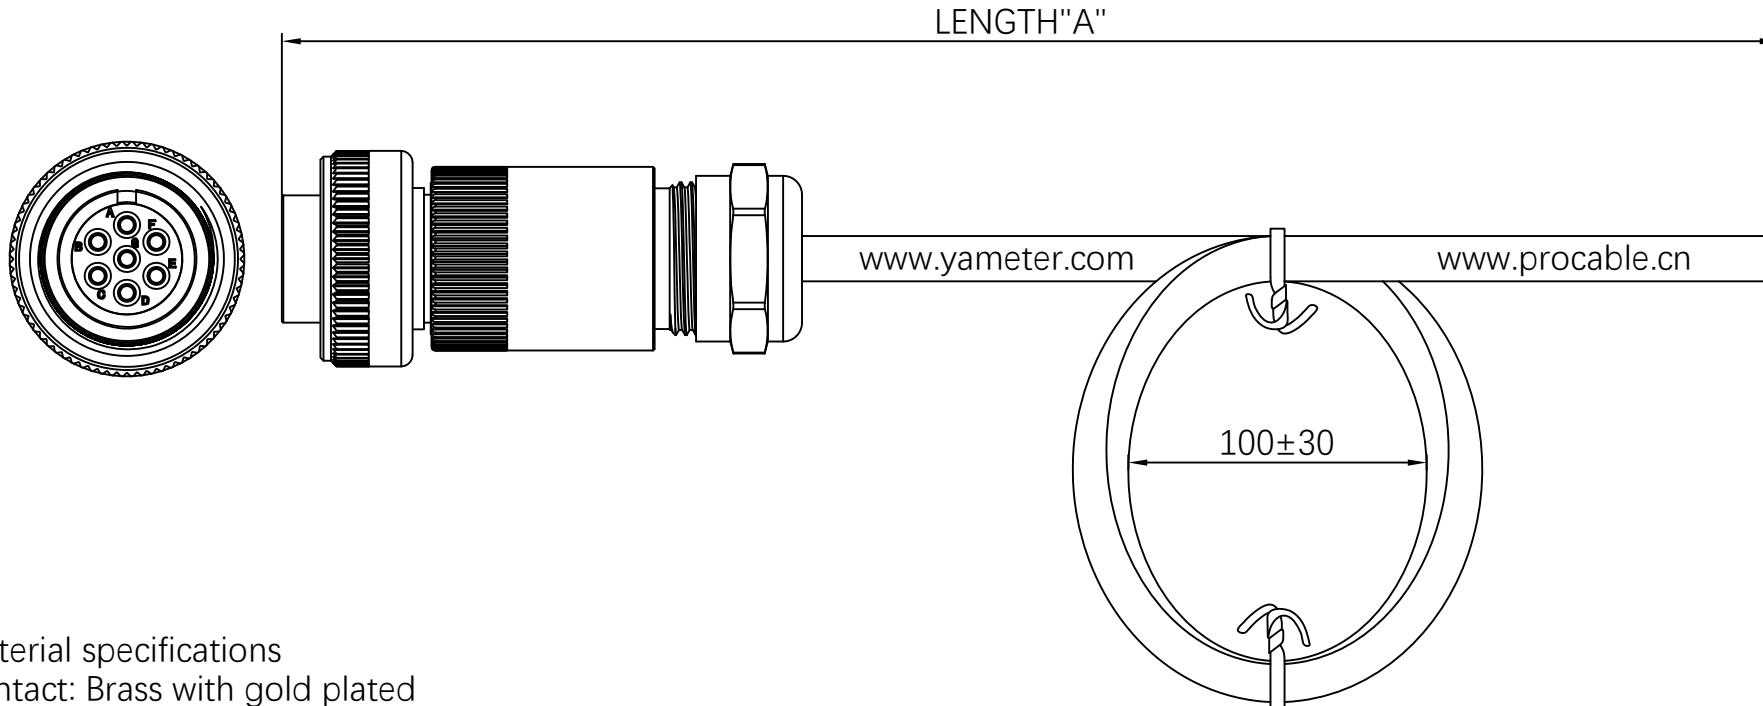

Material specifications

Contact: Brass with gold plated
 Insulation: PA, Black, UL94V-0
 Housing: Aluminum Alloy

Mechanical properties

Minimum bending radius: Fixed installation: 8x Cable OD
 Flexible installation: 10x Cable OD

Electrical testing of finished cable

100% Open / Short / Miswiring testing
 Insulation resistance: DC300V 10MΩ
 Conductor resistance: 5Ω



UNMARKED TOLERANCES	TITLE		Yameter		SIZE A4	REV A
DIMENSIONS	TOLERANCE					
x.	±0.5					
x.x	±0.25					
x.xx	±0.15	CUSTOMER	-	CUSTOMER PART NO.	-	
0 to 500	+15 / -0	DRAWN BY	CLARA	PART NUMBER	servo-valve-07pos	
> 501	+3% / -0 of length	CHECKED BY	BILL	DRAWING NUMBER	servo-valve-07pos	
ANGLES		APPROVED BY	KIMKEE	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1
x°	±1°					

