

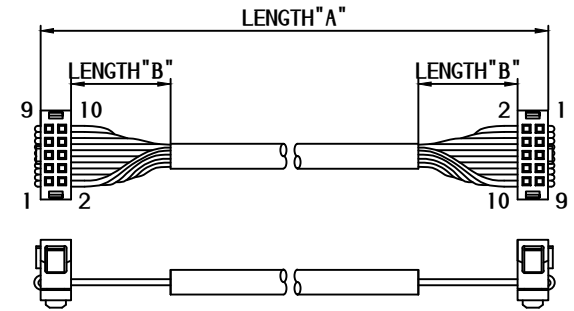
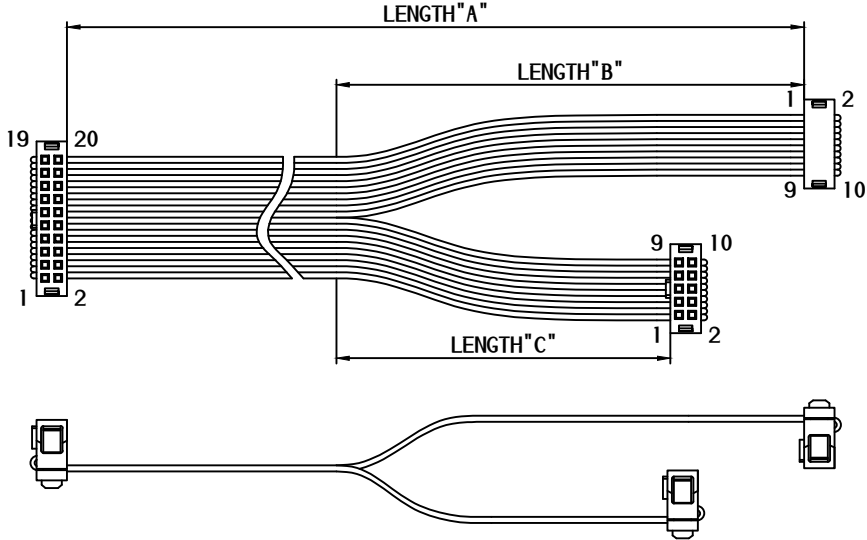


REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA



- Material:**
- . Housing: PBT, Black
  - . Contact: Brass, Gold-plated
- Technical Data:**
- . Rated Voltage: 300V
  - . Rated Current: 1A
  - . Rated Temperature: -40°C~+105°C
  - . Contact resistance: Initial value/10m Ωmax.  
After environmental testing/20m Ωmax.
  - . Insulation resistance: 1000M Ωmin.
  - . Withstanding voltage: 1500V AC/minute
  - . Applicable Wire: 30AWG~26AWG

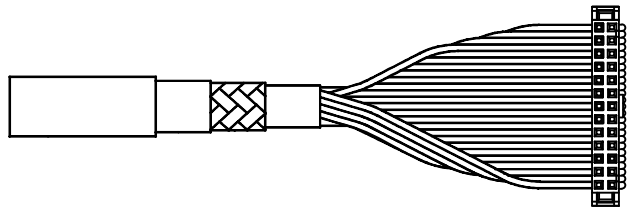

UNMARKED TOLERANCES	
DIMENSIONS	TOLERANCE
x.	±1.0
x.x	±0.5
x.xx	±0.25
0 to 500	+15 / -0
< 501	+3% / -0 of length
ANGLES	
x°	±1°



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	ROUND IDC CABLE / FC FLAT CABLE			
DWG NO	FC-IDC	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A3	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	mm
		SCALE	Free	Third angle projection