


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1		2		3		4		5		6		7		8		9		10		Customer drawing	
REV	ECN NO		DESCRIPTION					DATE		APPROVED		<div>RoHS</div>									
A	-		NEW RELEASED					2020.07.28		MAY.YU											





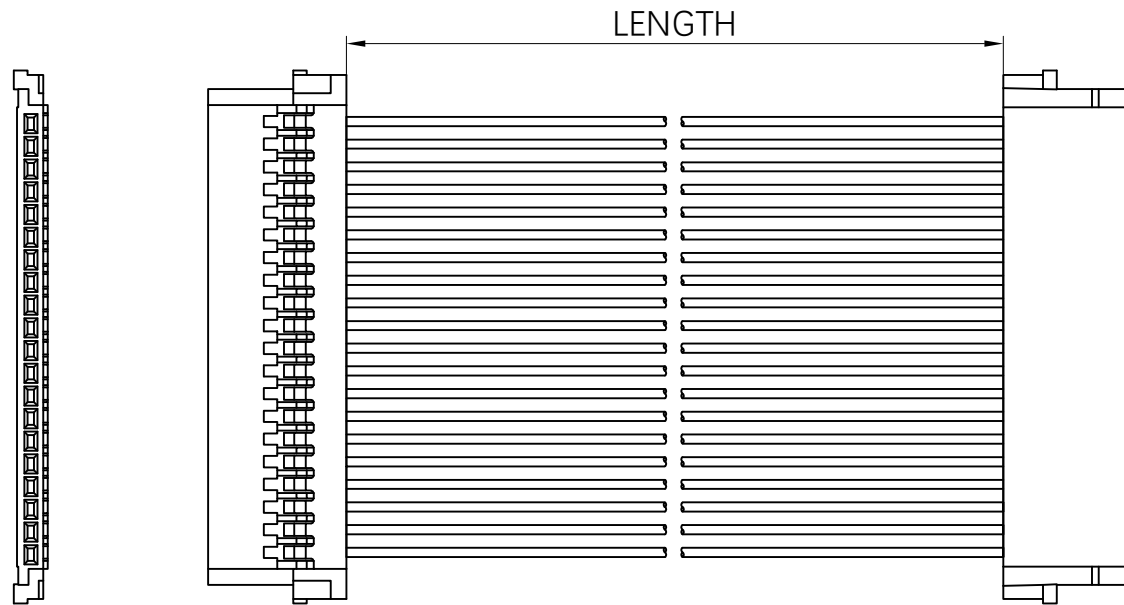

Material:

- . Housing: PA,UL94V-0
- . Contact: Copper alloy, Gold-plated

Technical Data:

- . Rated Voltage: 100V AC,DC
- . Rated Current: 1A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
- . Insulation resistance: 500M Ω min.
- . Withstanding voltage: 500V AC/minute
- . Applicable Wire: 30AWG~28AWG
- . Matched with Contact: DF19A-2830SCFA



UNMARKED TOLERANCES		TITLE HIROSE DF19-20S-1S CONNECTOR TERMINAL CABLE WIRING HARNESS		<div> Yameter</div> <div></div>			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-		
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	harness-df19	SIZE	REV
ANGLES		CHECKED BY	BILL.LEE	DRAWING NUMBER	harness-df19	A4	A
x°	±1°	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1

0 10 20 30 40 50 60 70 80 90 100 110 120