



1	2	3	4	5
REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA

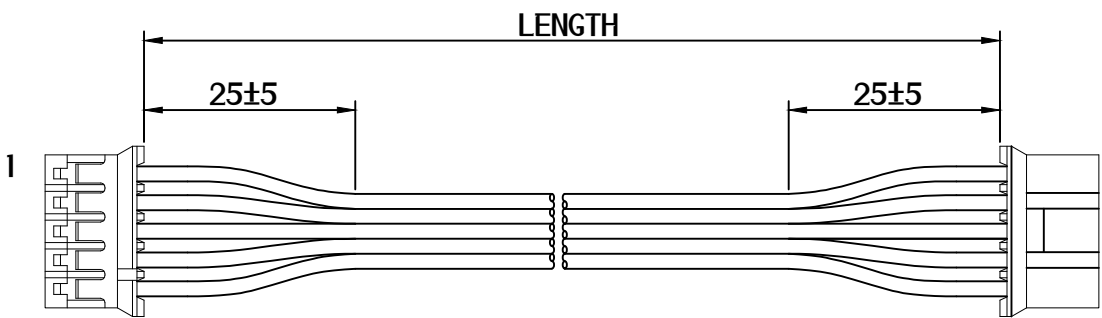

- Material:**
- Housing: PA66, White, UL94V-0
 - Contact: Phosphor bronze, Tin-plated
- Technical Data:**
- Rated Voltage: 125V AC, DC
 - Rated Current: 2A
 - Rated Temperature: -25°C~+85°C
 - Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
 - Insulation resistance: 1000M Ω min.
 - Withstanding voltage: 800V AC/minute
 - Applicable Wire: 24AWG~30AWG
 - Matched with Contact: SPH-002T-P0.5S

BOMCAN		This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com		
DESCRIPTION	2~16PINS JST PHR PITCH2.0mm CONNECTOR TERMINAL WIRING HARNESS			
DWG NO	HARNESS-PHR	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	MM
		SCALE	FREE	Third angle projection

www.bomcan.com

A

B

C

A

B

C

D