
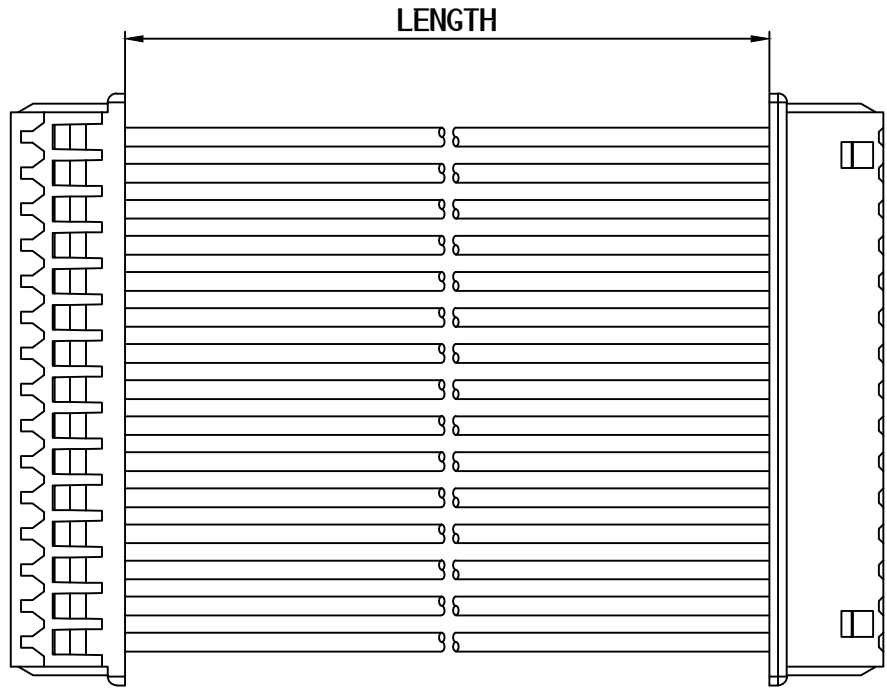
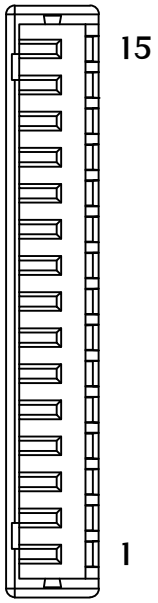


1		2		3	
REV	ECN NO	DESCRIPTION	DATE	APPROVED	
AA	-	NEW RELEASED	2015.05.12	CLARA	



Material:

- . Housing: PA66,White,UL94V-0
- . Contact: Phosphor bronze, Tin-plated

Technical Data:

- . Rated Voltage: 125V AC,DC
- . Rated Current: 1A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ωmax.
After environmental testing/20m Ωmax.
- . Insulation resistance: 500M Ωmin.
- . Withstanding voltage: 500V AC/minute
- . Applicable Wire: 26AWG~30AWG
- . Matched with Contact: 50079-8000



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	2~15PINS PITCH1.25mm TERMINAL WIRING HARNESS			
DWG NO	MOLEX51021	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	MM
			SCALE	Third angle projection
			FREE	

www.bomcan.com

A

B

C

1

2

3

4

5

A4

A

B

C

D