



REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA

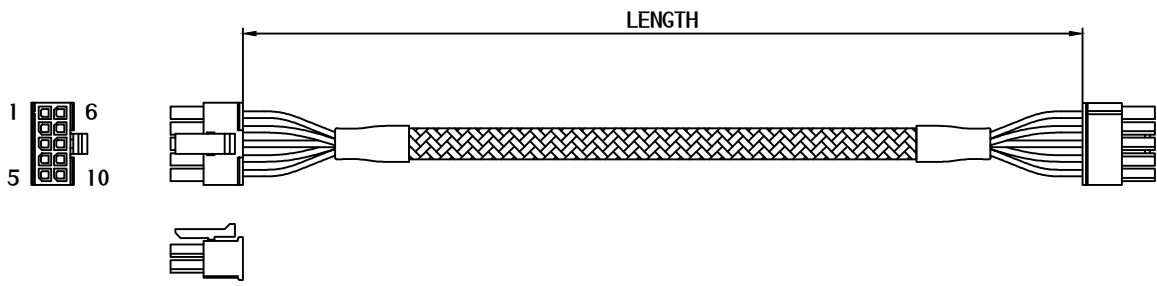

- Material:**
- . Housing: PA66, White, UL94V-0
 - . Contact: Phosphor bronze or brass, Tin-plated
- Technical Data:**
- . Rated Voltage: 250V AC, DC
 - . Rated Current: 5A
 - . Rated Temperature: -25°C~+85°C
 - . Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
 - . Insulation resistance: 1000M Ω min.
 - . Withstanding voltage: 1500V AC/minute
 - . Applicable Wire: 20AWG~24AWG

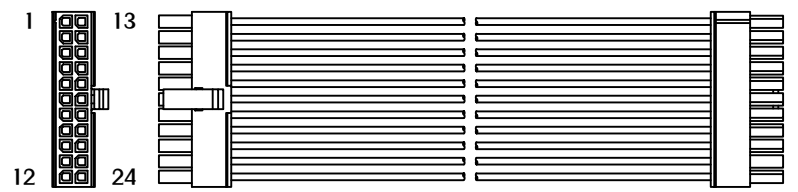

UNMARKED TOLERANCES	
DIMENSIONS	TOLERANCE
x.	±1.0
x.x	±0.5
x.xx	±0.25
0 to 500	+15 / -0
< 501	+3% / -0 ^{of length}
ANGLES	
x°	±1°



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	2-24PINS DUAL ROW MICROFIT HOUSING TERMINAL WIRE HARNESS			
DWG NO	HARNESS MICROFIT	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A3	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	mm
			SCALE	Free
				Third angle projection